

March 2024

OBTAINING SUPERPLASTICIZERS BASED ON PYROLYSIS COARSE TAR PRODUCTS

Kamola ZIYADULLAEVA

Chirchik State Pedagogical University, Chirchik, Uzbekistan, eldor_egamberdiyev@mail.ru

Atham RIMBAYEV

National University of Uzbekistan, Tashkent, Uzbekistan, atham_bulak@mail.ru

Orif KODIROV

Tashkent Chemical-Technological Institute, Tashkent, Uzbekistan, oqsh@bk.ru

Suvonqul NURMANOV

Tashkent Chemical-Technological Institute, Tashkent, Uzbekistan, nurmonov_se@mail.ru

Muattar QURBONOVA

Chirchik State Pedagogical University, Chirchik, Uzbekistan, muattar_erkinovna@gmail.com

Follow this and additional works at: <https://cce.researchcommons.org/journal>

Recommended Citation

ZIYADULLAEVA, Kamola; RIMBAYEV, Atham; KODIROV, Orif; NURMANOV, Suvonqul; and QURBONOVA, Muattar (2024) "OBTAINING SUPERPLASTICIZERS BASED ON PYROLYSIS COARSE TAR PRODUCTS," *CHEMISTRY AND CHEMICAL ENGINEERING*: Vol. 2023: No. 2, Article 2.

DOI: 10.34920/cce202322

Available at: <https://cce.researchcommons.org/journal/vol2023/iss2/2>

This Article is brought to you for free and open access by Chemistry and Chemical Engineering. It has been accepted for inclusion in CHEMISTRY AND CHEMICAL ENGINEERING by an authorized editor of Chemistry and Chemical Engineering. For more information, please contact zuchra_kadirova@yahoo.com.

OBTAINING SUPERPLASTICIZERS BASED ON PYROLYSIS COARSE TAR PRODUCTS

Kamola ZIYADULLAEVA¹ (eldor_egamberdiyev@mail.ru), **Atham RIMBAYEV²** (atham_bulak@mail.ru)
Orif KODIROV³ (oqsh@bk.ru), **Suvonqul NURMANOV³** (nurmonov_se@mail.ru)
Muattar QURBONOVA¹ (muattar_erkinovna@gmail.com)
¹Chirchik State Pedagogical University, Chirchik, Uzbekistan
²National University of Uzbekistan, Tashkent, Uzbekistan
³Tashkent Chemical-Technological Institute, Tashkent, Uzbekistan

The aim of the study is to obtain superplasticizers based on pyrolysis products of the Ustyurt gas chemical complex. The chemical composition of heavy pyrolysis distillate was studied and analyzed, the qualitative and quantitative composition of samples of heavy pyrolysis oil was studied, and heavy pyrolysis oils were separated into fractions at different temperatures. The process of obtaining naphthalene, indene and phthalic anhydride based on the distillation of liquid and solid fractions of heavy pyrolysis products has been implemented, the quantitative and qualitative composition of resin samples and products of processing of their fractions has been determined. On the basis of the developed catalysts, superplasticizers, additives to cement, were obtained, their strength, the average density of cement particles, the effect of the amount of superplasticizers and the duration of their action on the properties of the material were studied. The influence of catalysts on the process of obtaining superplasticizers has been studied, the results of tests of cement with a synthesized superplasticizer have been studied. The structure of substances has been proven by the results of UV spectroscopy.

Keywords: pyrolysis heavy distillate, naphthalene, indene, phthalic anhydride, superplasticizer

ПОЛУЧЕНИЕ СУПЕРПЛАСТИФИКАТОРОВ НА ОСНОВЕ ПРОДУКТОВ ПИРОЛИЗА

Камола ЗИЯДУЛЛАЕВА¹ (eldor_egamberdiyev@mail.ru), **Адхам РИМБАЕВ²** (atham_bulak@mail.ru)
Ориф КОДИРОВ³ (oqsh@bk.ru), **Сувонкул НУРМАНОВ³** (nurmonov_se@mail.ru)
Муаттар КУРБОНОВА¹ (muattar_erkinovna@gmail.com)
¹Чирчикский государственный педагогический университет, Ташкент, Узбекистан,
²Национальный университет Узбекистана, Ташкент, Узбекистан
³Ташкентский химико-технологический институт, Ташкент, Узбекистан

Целью исследования является получение суперпластификаторов на основе продуктов пиролиза Устыуртского газохимического комплекса. Изучен и проанализирован химический состав тяжелого пиролизного дистиллята, изучен качественный и количественный состав проб тяжелого пиролизного масла, проведено разделение тяжелых пиролизных масел на фракции при различных температурах. Реализован процесс получения нафталина, индена и фталевого ангидрида на основе перегонки жидкой и твердой фракций тяжелых продуктов пиролиза, определен количественный и качественный состав образцов смол и продуктов переработки их фракций. На основе разработанных ранее катализаторов получены суперпластификаторы – добавки к цементу, изучены их прочность, средняя плотность частиц цемента, влияние количества суперпластификаторов и продолжительности их действия на свойства материала. Изучено влияние катализаторов на процесс получения суперпластификаторов, изучены результаты испытаний цемента с синтезированным суперпластификатором. Строение веществ доказано по результатам УФ спектроскопии.

Ключевые слова: пиролизный тяжелый дистиллят, нафталин, инден, фталевый ангидрид, суперпластификатор

OG'IR PIROLIZ MOYLARI ASOSIDA SUPERPLASSIFIKATORLAR OLISH

Kamola ZIYADULLAEVA¹ (eldor_egamberdiyev@mail.ru), **Atham RIMBAYEV²** (atham_bulak@mail.ru)
Orif KODIROV³ (oqsh@bk.ru), **Suvonqul NURMANOV³** (nurmonov_se@mail.ru)
Muattar QURBONOVA¹ (muattar_erkinovna@gmail.com)
¹Chirchiq davlat pedagogika universiteti, Chirchiq, O'zbekiston
²Toshkent kimyo-texnologiya instituti, Toshkent, O'zbekiston
³O'zbekiston Milliy universiteti, Toshkent, O'zbekiston

Tadqiqot maqsadi Ustyurt gaz-kimyo majmuasining piroliz mahsulotlari asosida superplastiklashtiruvchi moddalarni olishdan iborat. Og'ir piroliz distillatining kimyoviy tarkibi o'rganildi va tahlil qilindi, og'ir piroliz moyi namunalarining sifat va miqdoriy tarkibi o'rganildi va og'ir piroliz moylari turli haroratlarda fraksiyalarga ajratildi. Og'ir piroliz mahsulotlarining suyuq va qattiq fraksiyalarini distillash asosida naftalin, inden va ftalik ангидрид olish jarayoni amalga oshirildi, smola namunalari va ularning fraksiyalarini qayta ishlash mahsulotlarining miqdoriy va sifat tarkibi aniqlandi. Gaz kimyosining ikkilamchi mahsulotlari asosida og'ir piroliz moylari tarkibidan inden va naftalin moddalarini ajratib olish jarayoni uchun turli tarkibli katalizatorlar yaratilgan. Ishlab chiqilgan katalizatorlar asosida superplastiklashtiruvchi moddalar, sementga qo'shimchalar olindi, ularning mustahkamligi, tsement zarrachalarining o'rtacha zichligi, superplastiklashtiruvchi moddalar miqdori va ularning ta'sir qilish muddati materialning xususiyatlariga ta'siri o'rganildi. Katalizatorlarning superplastifikatorlar olish jarayoniga ta'siri o'rganildi, sementning sintezlangan superplastiklashtiruvchi bilan sinovlari natijalari o'rganildi. Moddalarning tuzilishi UV spektroskopiya natijalari bilan isbotlangan.

Kalit so'zlar: og'ir piroliz distillati, naftalin, inden, ftal ангидрид, superplastifikator

DOI: 10.34920/cce202322

Introduction

The purpose of pyrolysis processes, which are extremely common in modern world petrochemistry, is to obtain lower olefins, mainly ethylene, they are a valuable raw material for the synthesis of the most important petrochemical products [1-3].

During pyrolysis, ethylene, propylene, butylene and butadiene, a significant amount of benzene, aromatic hydrocarbon derivatives such as toluene, xylene, indene, naphthalene, anthracene are released. Ethylene obtained by pyrolysis is used for the production of ethylene oxide, ethyl alcohol, polymers, styrene, plastics and other

products. The main areas of use of liquid pyrolysis products are the production of benzene and other aromatic hydrocarbons, oils from polymer resins, diesel fuels, carbon, and high quality coke [4, 5].

To improve the quality of the cement composition, it is important to use highly effective plasticizing additives. In the construction industry, to regulate the processes of structure formation and rheological properties of concentrated suspensions, superplasticizers are used - chemical additives that allow you to change the mobility of raw materials and the properties of finished products [6-8]. One of the urgent tasks today is the search for new effective additives that allow you to change the interface and change the rheological properties of the dispersion. The aim of the study is to obtain superplasticizers based on pyrolysis products of the Ustyurt gas chemical complex.

Research methods

The qualitative and quantitative composition of samples of heavy pyrolysis oils was studied and superplasticizers were created on their basis. The density of superplasticizers, the ratio of additives to the gypsum mass was studied on the basis of the QMQ 310-2003 standard. The composition of the prepared samples was analyzed using a UV-1900i spectrometer and an Agilent 5977-A 30 m × 0,25 mm gas chromatograph.

Results and Discussion

The main direction of the economic development of the Republic is the development of natural resources, their use, large-scale modernization of industrial production, technical and technological renewal, the introduction of modern scientific achievements and progressive innovative technologies in production, the creation of competitive, import-substituting products with stable demand in the world market.

The Ustyurt gas-chemical complex is one of the largest enterprises for the production of polymer products in Central Asia, based on the processing of natural gas in the Ustyurt region. The total annual production capacity of the complex is 387 thousand tons of polyethylene and 83 thousand tons of polypropylene. This produces more than 102 thousand tons of pyrolysis distillates, 8 thousand tons of pyrolysis oil and 10 thousand tons of resin. pyrolysis distillates, pyrolysis oils and resin products generated in this process are

not recycled. Pyrolysis distillates and pyrolysis oils naphthalene, aromatic hydrocarbons are currently the main secondary raw materials for the production of valuable chemical products needed for industrial needs.

The processing of heavy fractions of liquid pyrolysis products and the introduction of these products into practice in the future are considered relevant, allowing the production of expensive and necessary products based on modern technologies. Due to the lack of acceptable technologies for the processing of pyrolysis waste for the production of indene, naphthalene and its homologues, phthalic anhydride is not produced in the country. Therefore, research aimed at developing technologies for processing waste from gas chemical complexes is an urgent task and requires its own solution.

Pyrolysis distillate and pyrolysis oil, as well as heavy fractions of liquid pyrolysis products, are secondary raw materials with great potential for the production of naphthalene, aromatic hydrocarbons, indene, phthalic anhydride and other valuable chemical products.

At present, modern technology allows us to produce expensive and necessary products. Due to the lack of acceptable technologies for the processing of pyrolysis waste for the production of indene, naphthalene and its homologues, phthalic anhydride is not produced in our country. Therefore, research aimed at developing an integrated technology for processing waste from gas chemical complexes operating in the republic is an urgent task and requires its solution.

The process of thermal pyrolysis of hydrocarbon raw materials is the main method for obtaining low molecular weight unsaturated hydrocarbons - olefins (alkenes) - ethylene and propylene. The main areas of use of liquid pyrolysis products are the production of benzene and other aromatic hydrocarbons, naphthalene, petroleum polymers, gasoline, raw materials for the production of high quality coke, etc.

Currently, due to the reduction in oil production in the petrochemical industry, the problem of expanding the raw material base for the production of aromatic hydrocarbons and their various derivatives is exacerbated. Heavy pyrolysis products indene and naphthalene, as well as their homologues, are of great interest as a potential raw material for the production of petrochemical products.

Table 1

Chemical composition of pyrolysis distillate

Number of car-	Alkanes	Dienes	Olefins	Cycloalkanes	Arenas	Total
5	0,8	0,89	4,91	0,19	0	6,79
6	0,22	0,41	3,87	0,41	32,94	37,85
7	0,25	0,14	0,84	0,45	11,23	12,91
8	0,12	0,08	0,18	0,48	9,75	10,61
9	0,04	0,1	0,04	0,15	7,56	7,89
10	0,03	0,11	9,07	0,4	5,23	14,84
11	0,18	0,69	2,95	0	0,47	4,29
12	0	0,15	1,84	0	0	1,99
Total	1,64	2,57	23,7	2,08	67,18	97,17

Secondary gas chemical products at different temperatures were separated into naphthalene and indene fractions. Based on the obtained products, catalysts of various compositions (VBC-33, VBC-44, VBC-55, VBC-66) were created [9].

In Uzbekistan, ethane, propane-butane fractions and gas condensates are the priority raw materials for thermal pyrolysis of hydrocarbons. In the course of the study, heavy fractions of liquid and solid pyrolysis products, secondary gas chemical products, and the chemical composition of the pyrolysis distillate were studied. Analysis of the results showed that the secondary products isolated from heavy pyrolysis are a liquid with a pungent odor, in the form of a dark brown fat-like liquid, and the composition of the resulting pyrolysis raw material is unstable.

In order to use liquid pyrolysis products as secondary raw materials and develop a technology for its processing, work was carried out to study the chemical composition of pyrocondensate produced in the Ustyurt Gas Chemical Complex (Table 1).

Fractions of naphthalene and its homologues were isolated from heavy pyrolysis resin by dealkylation and rectification. The production of naphthalene is carried out on the basis of local raw materials, which positively affects the efficiency of the entire process of processing heavy pyrolysis resin. At the same time, the main problem of the effective use of heavy pyrolysis products is associated with asphaltenes and mechanical impurities in its composition.

The isolated products from heavy pyrolysis oils are odorless and depend on the composition of the feedstock. Pyrocondensates from heavy pyrolysis products containing indene and naphtha-

lene make it possible to synthesize phthalic anhydride on their basis [10].

Table 2


Qualitative and quantitative composition of heavy pyrolysis resin samples

Substances	Quantity, %	Compliance degree	Retention time, minutes
Inden	9,33	93	12,30
1-methylindene	8,96	96	14,72
Naphthalene	41,51	90	15,47
1-methylnaphthalene	8,61	97	17,59
2-methylnaphthalene	16,25	96	17,34
1-ethyl naphthalene	1,77	90	18,78
1,6-dimethylnaphthalene	1,71	95	19,18

The qualitative and quantitative composition of heavy pyrolysis resin samples was studied. The studies were carried out using an Agilent 5977-A 30 m × 0,25 mm gas chromatograph, the composition of the prepared sample was analyzed by chromato-mass spectroscopy, the results are shown in Table 2.

In the construction industry, superplasticizers are used to control the process and structure formation and rheological properties of organic chemical additives-concentrated suspensions, which make it possible to purposefully change the fluidity of mixtures of raw materials and the properties of finished products.

Based on this, in the course of the work, a superplasticizer was synthesized based on naphthalene, obtained from secondary raw materials of production. The resulting hydrolyzed polyacrylonitrile, the synthesized superplasticizer, and the diluted superplasticizer were analyzed by UV spectroscopy (Fig.).

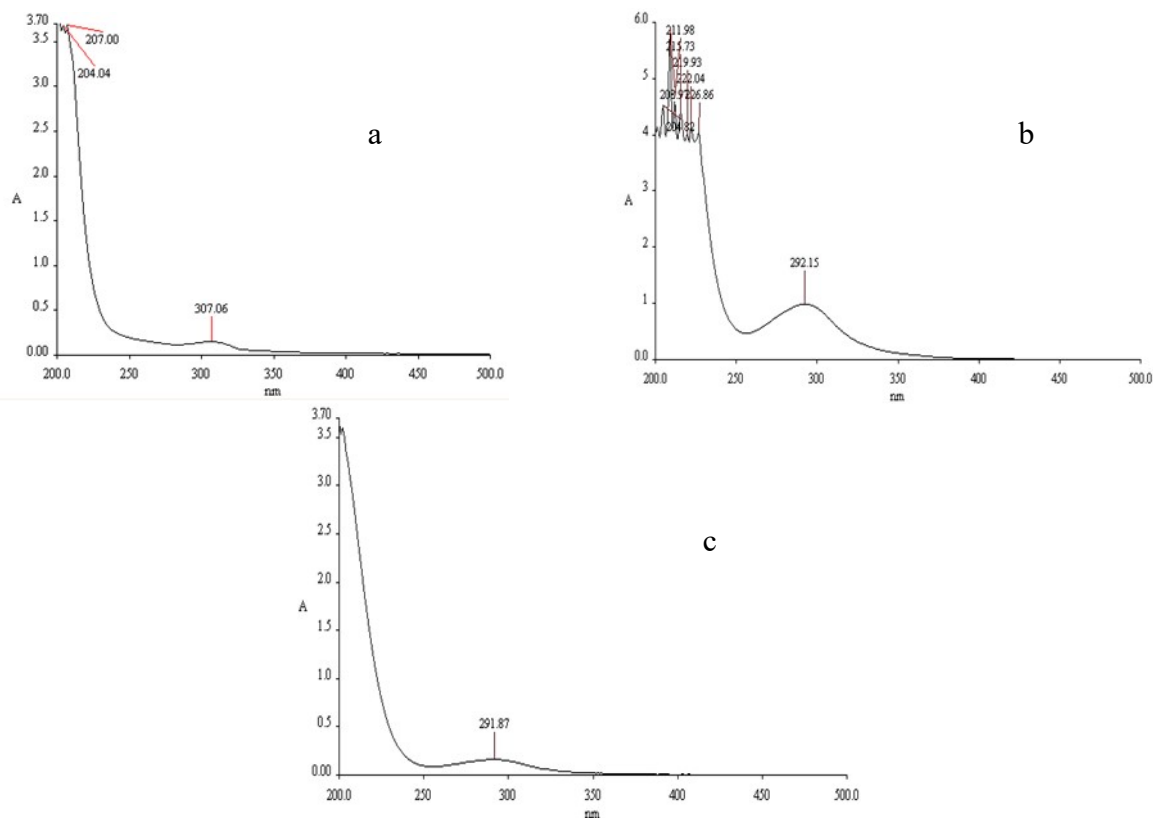

Results of UV spectroscopy of superplasticizer:
a – hydrolyzed polyacrylonitrile; b – synthesized super plasticizer; c – molten super plasticizer.

Portland cement grade PS 400 D-20, gypsum and cement with a high aluminum content were chosen as a dry building material for testing superplasticizers, and the effect of superplasticizers on the properties of these products was studied (Table 3).

Superplasticizers were added up to 1% by

weight of the binder. The addition of superplasticizers by more than 1% in most cases led to a decrease in the strength of the cement.

The analysis of the obtained results shows that by adding a superplasticizer to the mass at a constant water-cement ratio, the strength of the product increases, and the average density of ce-

Test results of cement with synthesized superplasticizer

Table 3

Mass of cement, g	The number of additives by weight of cement, %	W/C ratio	Average density, g/cm ³	Density after 28 days, MPa
100	-	0.31	2.065	25
100	0.05	0.30	2.05	25
100	0.2	0.29	2.142	27
100	0.5	0.28	2.12	28
100	0.8	0.27	2.15	30
100	1	0.27	2.192	31

Test results of cement pastes with synthesized superplasticizer and high aluminum content

Table 4

Amount of cement, g	The amount of additives by weight of cement, %	W/C ratio	Average density, g/cm ³	Density after 28 days, MPa
100	-	0.43	6	37
100	0.02	0.43	6	38
100	0.2	0.43	7	42
100	0.5	0.43	8	45
100	0.8	0.43	11	50
100	1	0.43	13	54
100	1	0.39	6	66

Table 5

Test results of the synthesized superplasticizer and gypsum pastes

The amount of gypsum, g	The number of additives in relation to the mass of gypsum, %	W/C ratio (water cement ratio)	Distribution sm	Density after 28 days, MPa
100	-	0,5	8	11,6
100	0,03	0,5	8	16,1
100	0,2	0,5	9	15,0
100	0,5	0,5	10	13,3
100	0,8	0,5	11	12,0
100	1,0	0,5	13	11,0

ment particles increases with an increase in the amount of superplasticizer, which indicates the durability of the cement mixture, and the duration of its operation improves.

As can be seen from Table 4, with the addition of a superplasticizer, the fluidity of high-aluminum cement is 13 sm. Comparison of these results with conventional cement compositions showed an increase in plasticity. Based on the literature data, we can say that this is due to the high content of tricalcium aluminum. The production of superplasticizers based on pyrocondensate-pyrolysis products was studied, cement mixtures with superplasticizers were studied, their amount in gypsum mixtures after testing Table 5.

The superplasticizer also has an average plasticizing effect, with an increase in the amount of superplasticizer, the density increases from 11,6 MPa to 16,1 MPa, with an increase in the amount of additives compared to the mass of gypsum from 0,2 to 1%, the density of the mixture decreases from 15 up to 11 MPa.

Conclusions

The pyrolysis distillate mainly contains 67,18% arenes with the number of carbon atoms 6-12 and 23,7% olefins, which makes it possible to isolate naphthalene and indene from the distillate. Naphthalene, indene and their homologues were isolated from the composition of heavy pyrolysis oils of gas processing plants, and plasticizers for concrete and cement were also obtained.

At the same time, the influence of catalysts of different compositions on superpassivators in the process of extracting indene and naphthalene substances from the composition of heavy pyrolysis products, the chemical composition of heavy pyrolysis distillate, the qualitative and quantitative composition of samples of heavy pyrolysis oil and the test results of cement with synthesized superplasticizer were studied and analyzed. The structure of the resulting substances and their physico-chemical properties have been proven using various methods.

REFERENCES

1. Pavlovich L.B., Andreikov E.I. Improving the Production of Phthalic Anhydride from Industrial Grade Naphthalene. *Koks i Khimiya*, 2013, 56(9), 59-62.
2. Romanova N.A., Leont'eva V.S., Khrekina A.S. Production of Commercial Naphthalene by Coal-Tar Processing. *Koks i Khimiya*, 2018, 61(11), 453-456. *Koks i Khimiya*, 2018, 61(11), 36-40.
3. Biswa Mohan Sahoo., Bera Venkata Varaha, Ravi Kumar, Bimal Krishna Banik, Preetismita Borah. Polyaromatic Hydrocarbons (PAHs): Structures, Synthesis and their Biological Profile. *Current Organic Synthesis*, 2020, 17(8), 625-640.
4. Shengnan Sha, Min WangCai, Caijun Shi, Yuchong Xiao. Influence of the structures of polycarboxylate superplasticizer on its performance in cement-based materials-A review. *Construction and Building Materials*, 2020, 233. DOI: 10.1016/j.conbuildmat.2019.117257
5. Ziyadullayeva K.KH., Nurmanov S.E., Mukhiddinov B.F., Kodirov O.SH., Vapoyev KH.M. Katalizator oksleniya VK-10-2 dlya proizvodstva ftalevogo angidrida iznaftalina [Oxidation catalyst VK-10-2 for the production of phthalic anhydride from naphthalene]. *Natsional'naya assotsiatsiya uchenykh*, 2020, 61, 46-49.
6. Gamaliy Ye.A. *Kompleksnyye modifikatory na osnove efirov polikarboksilatov i aktivnykh mineral'nykh dobavok dlya tyazhelego konstruksionnogo betona. Diss. kand. tekhn. nauk* [Complex modifiers based on polycarboxylate ethers and active mineral additives for heavy structural concrete. Cand. tech. sci. diss.]. Chelyabinsk, 2009. 217.
7. Ibragimov R.A. *Tyazhehye betony s kompleksnoy dobavkoy na osnove efirov polikarboksilatov. Diss. kand. tekhn. nauk* [Heavy concretes with a complex additive based on polycarboxylate ethers. Cand. tech. sci. diss.]. Kazan', 2011, 184.
8. Ramachandran V.S. *Dobavki v beton. Spravochnoye posobiye* [Additives in concrete. Help Guide]. Moscow, Stroyizdat Publ, 1988. 244.
9. Ziyadullayeva K.KH., Nurmanov S.E., Kurbanova A.Dzh., Akhmedova N. Tekhnologicheskkiye osnovy prigotovleniya i izucheniye svoystv katalizatorov pri poluchenii ftalevogo angidrida na osnove naftalina [Technological bases for the preparation and study of the properties of catalysts in the production of phthalic anhydride based on naphthalene]. *Universum: tekhnicheskkiye nauki*, 2021, 8, 37-43.
10. Batrakov V.G. *Modifitsirovannyye betony. Teoriya i praktik* [Modified concrete. Theory and practice]. Moscow, *Tekhnoprojekt Publ.*, 1998. 768.